


# SMP253



- EMI suppressor, class Y2, metallized paper SMD
- 0.001 – 0.0047  $\mu$ F, 250 VAC, +100 °C


TYPICAL APPLICATIONS	CONSTRUCTION
The capacitors are intended for use as interference suppressors in Y2 applications, line-to-earth.	Multi-layer metallized paper. Encapsulated and impregnated in self-extinguishing material meeting the requirements of UL 94V-0.
TECHNICAL DATA	
<b>Rated voltage</b>	250 VAC 50/60 Hz
<b>Capacitance range</b>	0.001 – 0.0047 $\mu$ F
<b>Capacitance tolerance</b>	$\pm$ 20%
<b>Temperature range</b>	-40 to +100°C
<b>Climatic category IEC</b>	40/100/56/B
<b>Approvals</b>	S, UL, CSA
<b>Dissipation factor <math>\tan\delta</math></b>	$\leq$ 1.3 % at 1 kHz
<b>Insulation resistance</b>	$\geq$ 12000 M $\Omega$ Measured at 500 VDC after 60 s, +23°C
<b>Test voltage between terminals</b>	The 100% screening factory test is carried out at 3000 VDC. The voltage level is selected to meet the requirements in applicable equipment standards. All electrical characteristics are checked after the test.

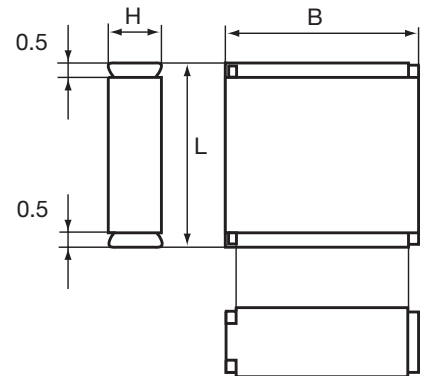

Components may be vertically mounted for decreased footprint. See page 20.

## RECOMMENDED SOLDERING CONDITIONS

**Reflow soldering temperature measured on the top body surface of the component**  
Preheating temperature should be less than 170°C. The time above 217°C should be less than 50 s. The peak temperature must not exceed 250°C.

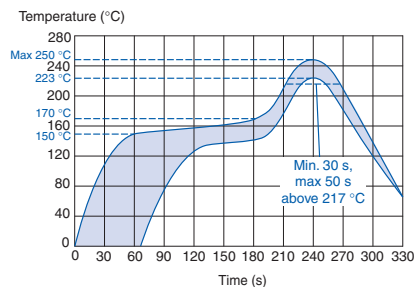

## ENVIRONMENTAL TEST DATA

<b>Vibration</b>	IEC 60068-2-6 Test Fc	3 directions at 2 hour each 10 – 500 Hz at 0.75 mm or 98 m/s <sup>2</sup>	No visible damage No open or short circuit
<b>Active flammability</b>	EN 132400		
<b>Passive flammability</b>	IEC 60384-14 (1993) EN 132400		Class B
<b>Humidity</b>	IEC 60068-2-3 Test Ca	+40°C and 90 – 95% R.H.	56 days

## ARTICLE TABLE

Capacitance $\mu\text{F}$	Dimensions in mm $\pm 0.2$ mm			Quantity per package		Max dU/dt V/ $\mu\text{s}$	Approvals			Article code
	B	H	L	Bulk	Reel		S	UL	CSA	
<b>CHIP LENGTH 12.7 MM CODE 5045</b>										
0.0010	11.5	6.5	12.7	1000	600	2000	✓	✓	✓	SMP253 MA4100M TR24
0.0015	11.5	6.5	12.7	1000	600	2000	✓	✓	✓	SMP253 MA4150M TR24
0.0022	11.5	6.5	12.7	1000	600	2000	✓	✓	✓	SMP253 MA4220M TR24
0.0025	11.5	6.5	12.7	1000	600	2000	✓	✓	✓	SMP253 MA4250M TR24
0.0033	11.5	6.5	12.7	1000	600	2000	✓	✓	✓	SMP253 MA4330M TR24
0.0039	11.5	6.5	12.7	1000	600	2000	✓	✓	✓	SMP253 MA4390M TR24
0.0047	11.5	6.5	12.7	1000	600	2000	✓	✓	✓	SMP253 MA4470M TR24

## APPROVALS/REFERENCE DOCUMENTS

Certification Body	Specification	Approval reference
S	EN 132400	9949069/01
UL	UL 1414	E73869
cUL recognition (CSA)	C 22.2 No. 1	E73869

## MARKING

- RIFA
- Article code SMP
- Rated capacitance
- Rated voltage
- Y2
- Manufacturing code (year, month)

## ORDERING INFORMATION

See article table and below for options and article code construction. Tape packaging, see page 20.

